

HB Series • High Power Inductors

Features

- High efficiency, high stability inductors
- Robust Construction
- Class F materials
- Manufactured in ISO 9001:2008, ISO/TS 16949:2009 and ISO 14001:2004 certified Talema facility
- Fully RoHS & REACH Compliant


Application

- Renewable energy
- Battery charger
- Automotive




Electrical Specifications @ 25°C:



Part Number	Inductance μH $\pm 10\%$	Current Rating Amps DC	DCR (mOhm) Typical
HB-6015	60	15	5.4
HB-4025	40	25	5.4
HB-3030	30	30	5.4
HB-2035	50	35	5.4
HB-1040	10	40	3.9
HB-0550	5	50	2.7

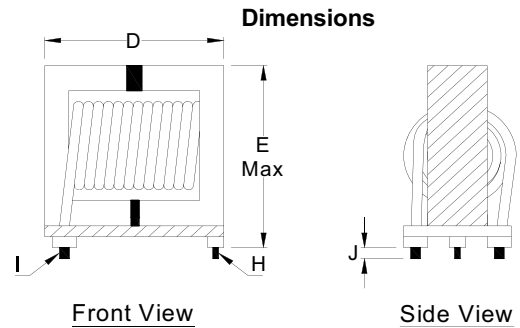

	A	B	C	D	E	F	G	H (θ)	I (θ)	J
Dimensions in "mm"	21.0	37.0	27.0	45.5	52.0	2.0	5.0	1.30	2.50	3.2



Dimensions in : mm
Tolerance: ± 0.25
unless specified otherwise

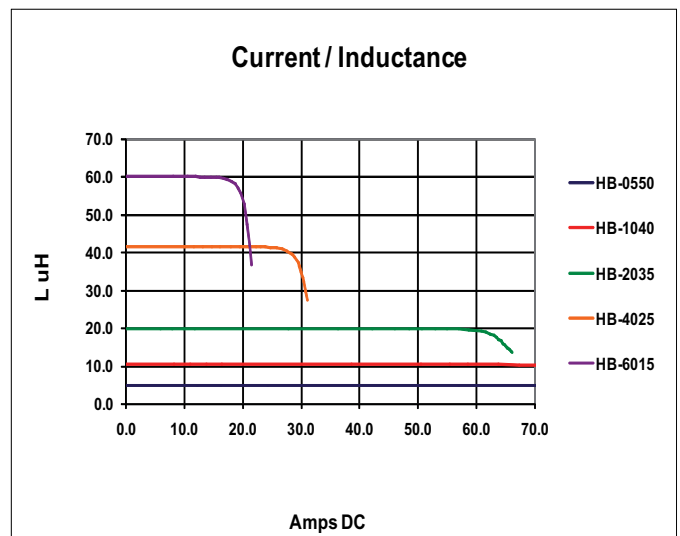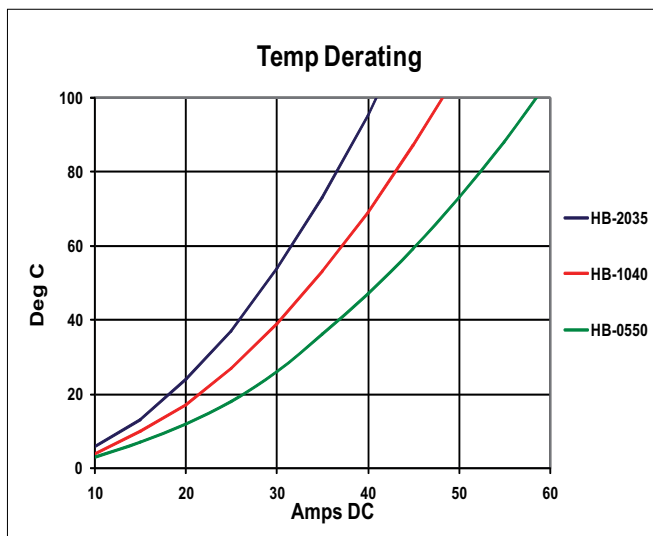

Note:

- Temperature de-rating curves not shown for saturation limited types
- Current Vs Inductance curves are typical at 100°C